Connecting the Rainier Receiver to your 4DTV or Analog Receiver

For Use with Our Slave Kit

- 1) Disconnect power cord from 4DTV wall outlet.
- 2) Remove coax from C band LNB in on 4DTV.
- 3) Connect LNB to In on Splitter in Slave Kit.
- 4) Connect jumper to 4DTV port (power pass) (see diagrams below)
- 5) Connect other end of jumper to 4DTV LNB C band in.
- 6) Connect jumper to 9865 port on splitter (non power pass)
- 7) Connect other end of jumper to Satellite in on D9865
- 8) Power up both receivers and program Rainier Receiver to receive channels.


See diagrams below for more reference.


Connection Diagrams

Splitter



Receivers Back View

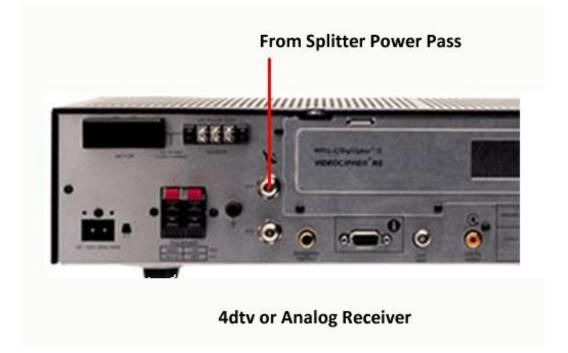

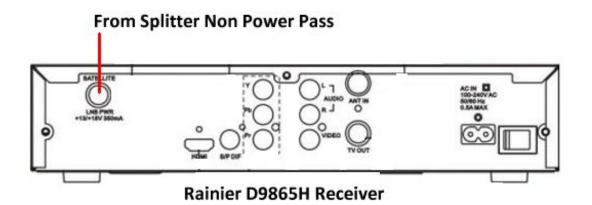



Slave Kit Document © Rainier Satellite 2015